

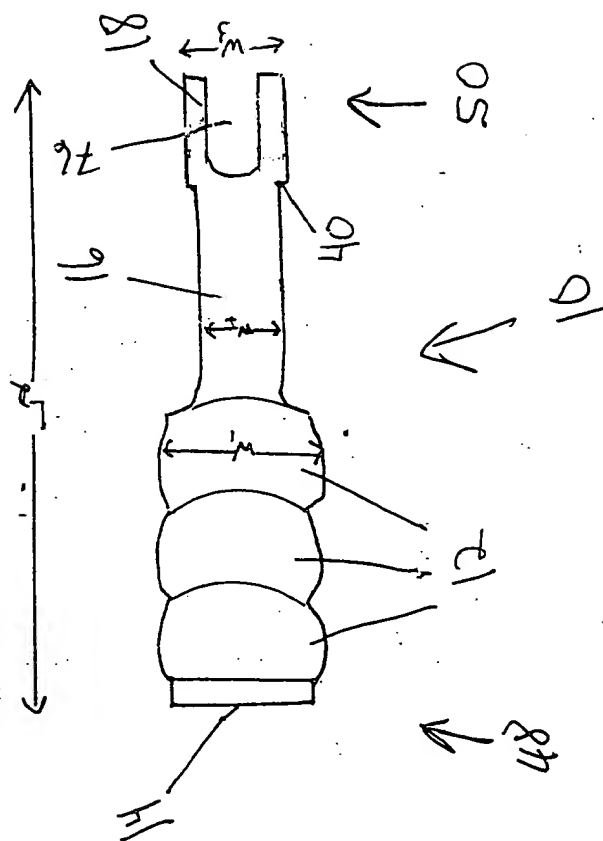
[illegible]

Figure 1

OFFICE: 5052250

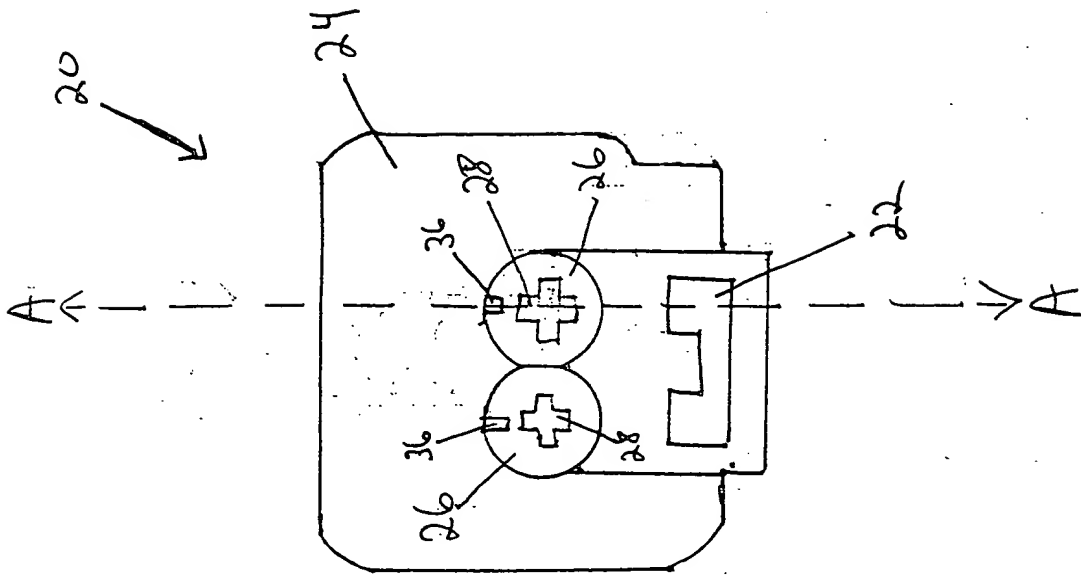


Figure 2

000121 5005460

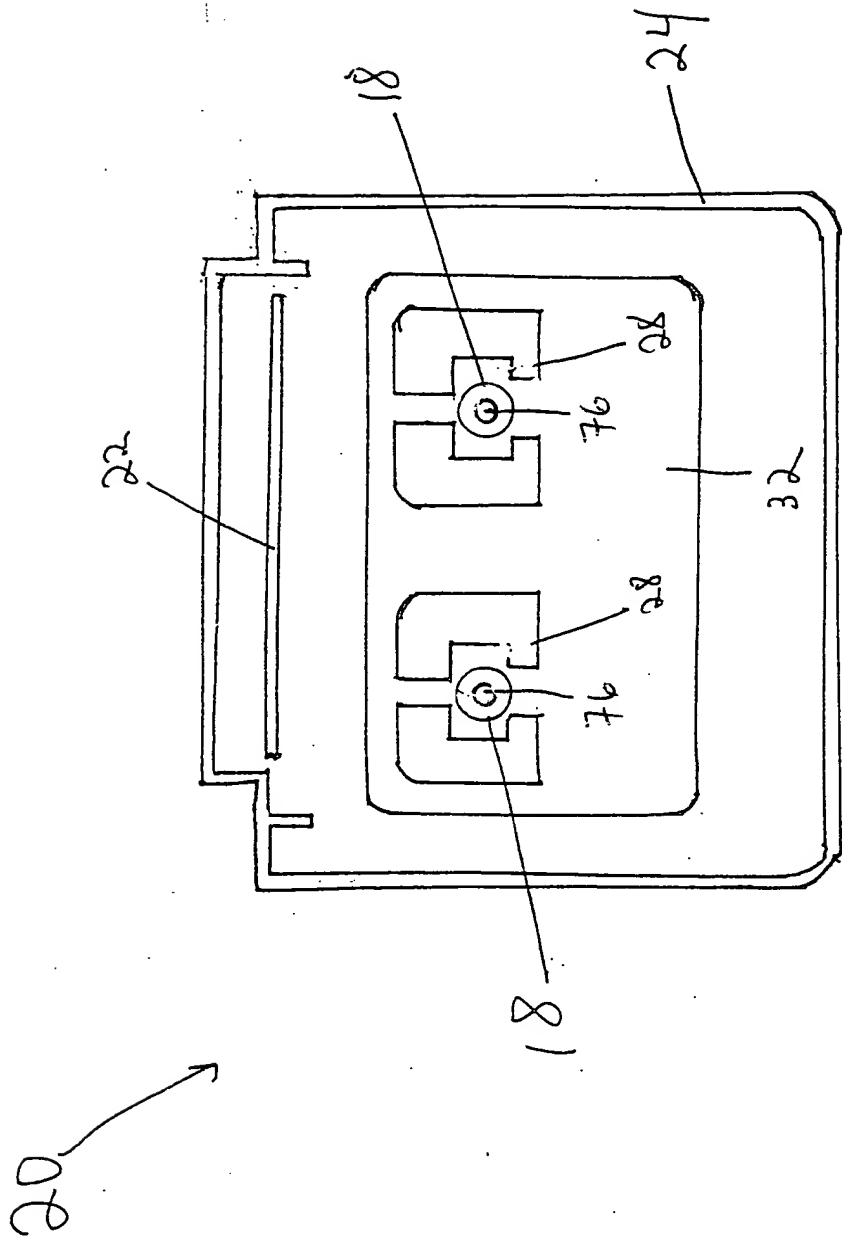


Figure 3

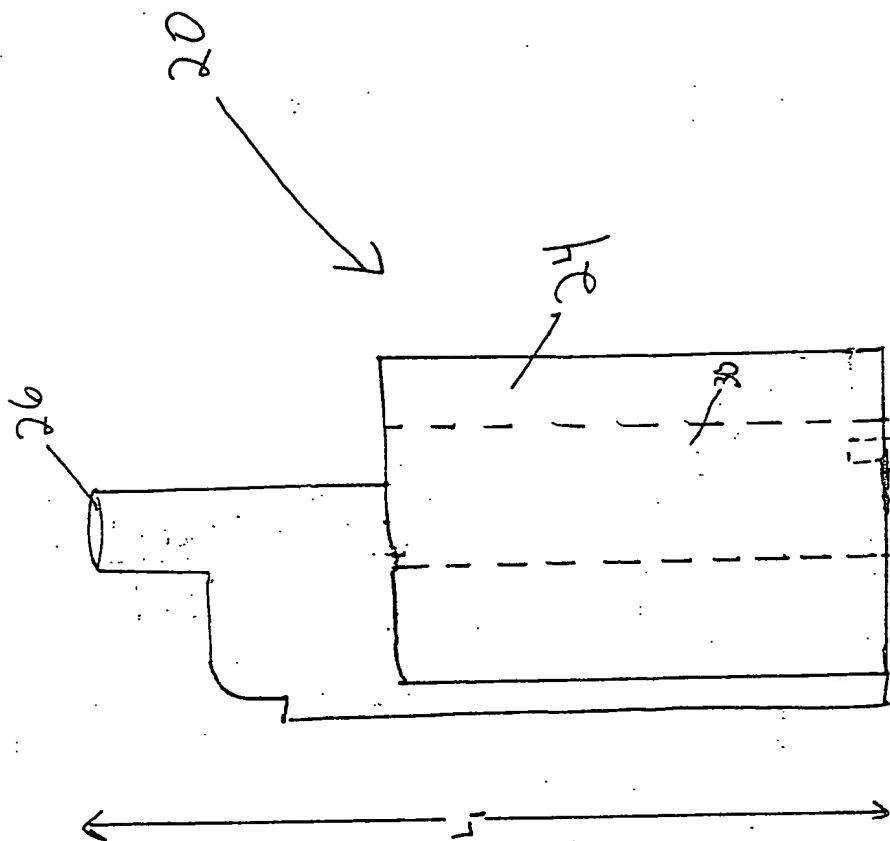
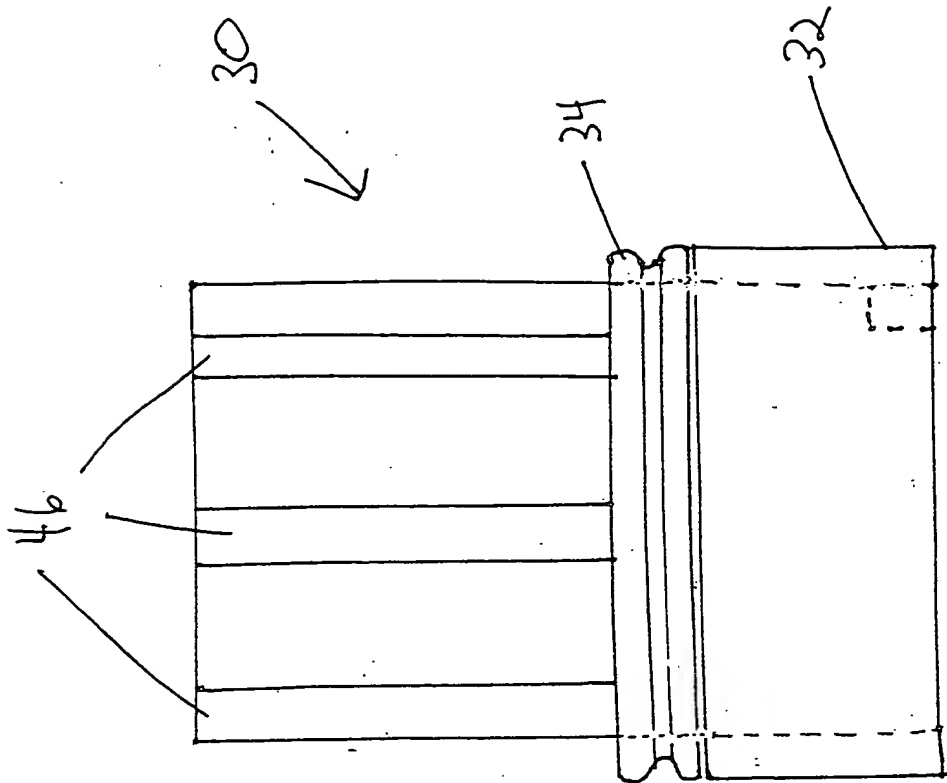
[illegible]

Figure 4

[illegible]

5207

Figure 6

00275095260

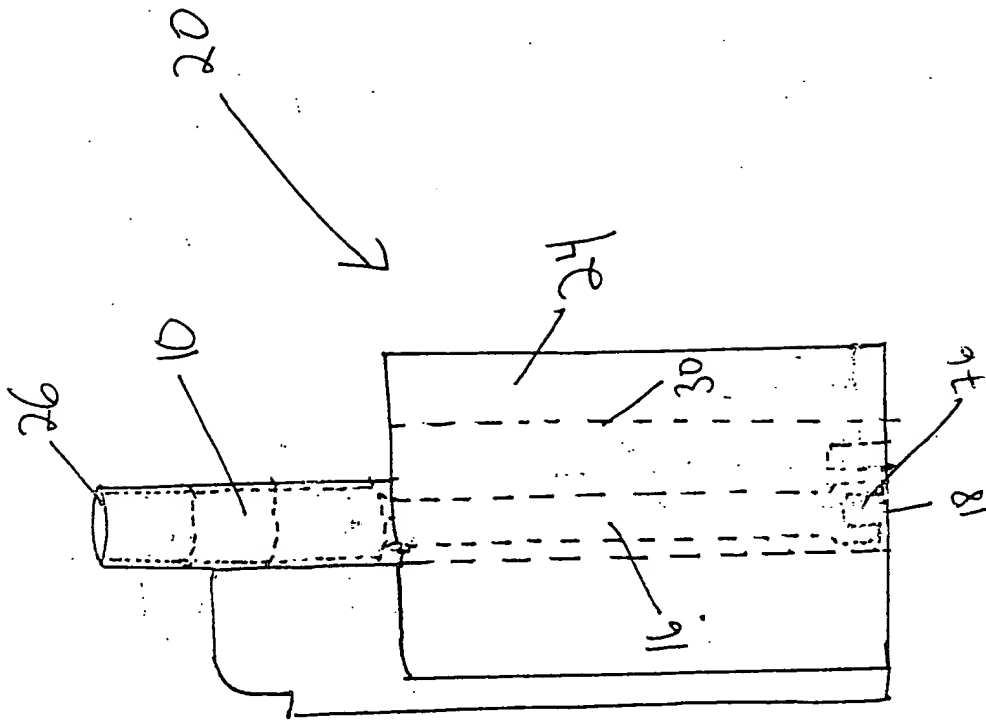


Figure 7

Figure 8



34

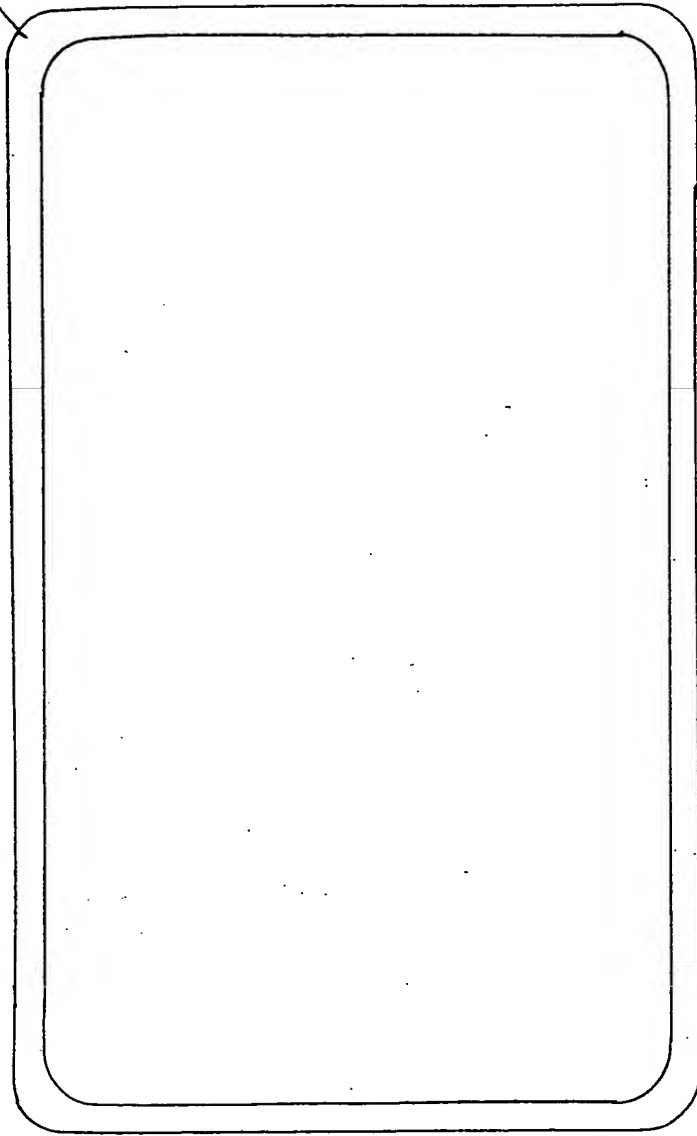


Figure 9

38



83

10

FIG. 1 is a schematic diagram of a device 62. The device consists of a top elongated part 66, a middle section containing a coiled spring 70, and a base 68. An arrow points from the label 62 to the top part 66.

FIGURE 12